

Pneumatic Nutrunner

DP2^{power}



Mining Industry



Oil & Gas Industry



Mechanical Engineering



Chemical Industry



One nutrunner – two variants



The right tool – reliable and powerful, ideal for every standard application

DP2power


The pneumatic nutrunner DP2power is powerful, sturdy and practical in operation and application: Simply set the pressure on the maintenance unit using the values in the torque table and start working straight away. With the DP2power, you have the perfect nutrunner at hand when it's not only about precision, but also about power and performance in continuous use!

- Compact dimensions thanks to short drive – for a low weight with high performance
- Suitable for use in difficult to access and confined environments
- Precise in execution
- Low noise and less vibration: Ergonomic work and low stress on the operator
- Torque range up to 8000 Nm




The **DP2power** with angular gear

Models

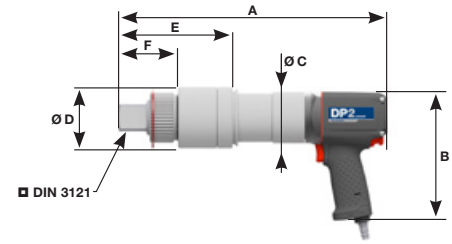

DP2_{power} – straight version

Type	Pressure (bar)	Torque range (Nm)	Idle speed 4 bar (rpm)	A (mm)	B (mm)	C (mm)	Ø D (mm)	E (mm)	F (mm)	□ = Output	Weight (kg)
DP2-05	6	125 - 500	26,7	290	181	72	68,5	145	60,5	¾"	4,7
DP2-10	6	250 - 1000	11,9	306	181	72	68,5	145	60,5	¾"	4,9
DP2-20	6	500 - 2000	5,4	330	181	72	80	140	61,5	1"	6,0
DP2-30	6	600 - 3000	3,4	346	181	72	80	140	61,5	1"	6,6
DP2-36	6	750 - 3600	3,1	346	181	72	80	140	61,5	1"	6,6
DP2-48	6	1200 - 4800	2,2	378	181	72	86	167,5	83,5	1½"	8,6
DP2-80	6	2200 - 8000	1,1	446	181	72	101	212	106	1½"	12,7

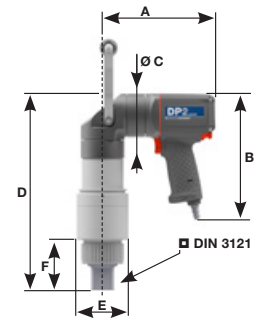

DP2_{power} – angle version

Type	Pressure (bar)	Torque range (Nm)	Idle speed 4 bar (rpm)	A (mm)	B (mm)	C (mm)	Ø D (mm)	E (mm)	F (mm)	□ = Output	Weight (kg)
DP2-05	6	125 - 500	26,7	186	181	72	237	68,5	60,5	¾"	5,7
DP2-10	6	250 - 1000	11,9	186	181	72	253	68,5	60,5	¾"	5,9
DP2-20	6	500 - 2000	5,4	186	181	72	277	80	61,5	1"	7,0
DP2-30	6	600 - 3000	3,4	186	181	72	292	80	61,5	1"	7,6
DP2-36	6	750 - 3600	3,1	186	181	72	292	80	61,5	1"	7,6
DP2-48	6	1200 - 4800	2,2	186	181	72	324	86	83,5	1½"	10,5
DP2-80	6	2200 - 8000	1,1	186	181	72	392	101	106	1½"	13,7


Maintenance unit

The required torque is set on the maintenance unit according to the value in the enclosed torque table.

Compressed air precondition is the prerequisite for functional reliability and long service life of the DP2_{power}



Reaction arms



Type	DP2 -05	DP2 -10	DP2 -30	DP2 -36	DP2 -48	DP2 -80
A (mm)	150	150	150	190	190	190
B (mm)	100	100	120	120	140	140
C (mm)	90	90	90	90	90	90
Weight (kg)	1,5	1,5	1,85	2,4	3,2	3,8


The right tool for every bolting application!

 Battery nutrunner



 Electric nutrunner




 Manual torque multiplier



 Hydraulic low clearance wrenches



 Hydraulic square drive wrenches




 Hydraulic tensioners



 Electric hydraulic power pack



 Battery hydraulic power pack



 Measurement and control technology



Have we piqued your interest?

Then contact our specialists, we look forward to your inquiry!



Phone: +49 (0) 2245 62-0



E-mail: info@plarad.de

PLARAD[®] 
Torque & Tension Systems

... a reliable connection

Maschinenfabrik Wagner GmbH & Co. KG
Birrenbachshöhe 17 · 53804 Much · Germany

www.plarad.de